



Thunderbird setting method (when using IMAP)

(1) Start Thunderbird and click [Tools] ⇒ [Account Settings].

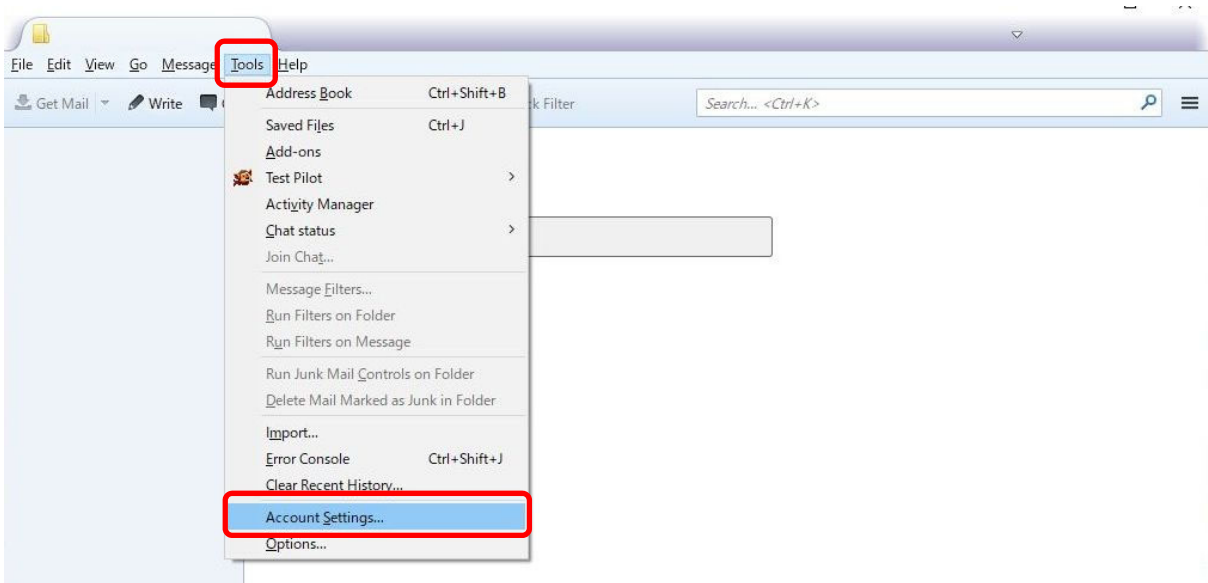

(2) Click [Account Actions] ⇒ [Add Mail Account].

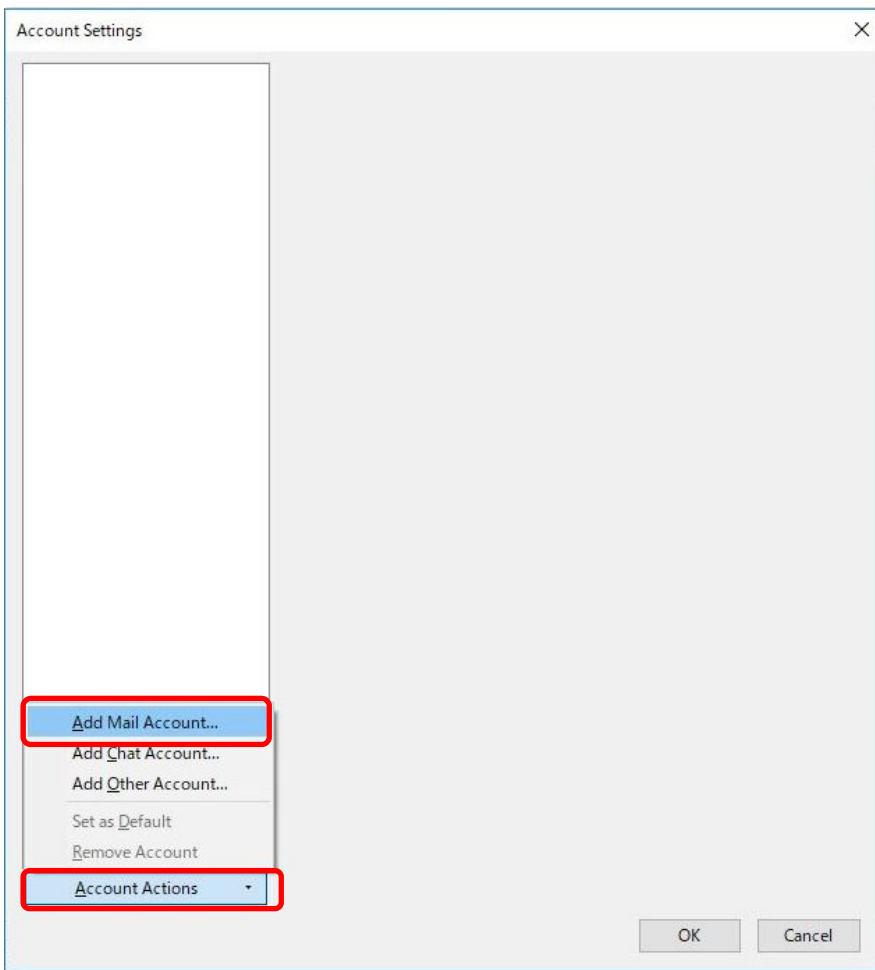

(3) Enter each item and click [Configure manually].

(4) Server search will start, but click [Manual config] and set as follows.

【Receiving server】

Protocol	IMAP
Host name of the server	hosting6.cc.kyushu-u.ac.jp
Number of Port	993
SSL	SSL/TLS
Authentication method	Normal password
Username	E-mail address used for hosting

【Sending server】

Protocol	SMTP
Host name of the server	hosting6.cc.kyushu-u.ac.jp
Port number	587
SSL	STARTTLS
Authentication method	Normal password
Username	E-mail address used for hosting

(5) When setting is completed, click [Done].

Manual configuration

INCOMING SERVER

Protocol: IMAP

Hostname: hosting6.cc.kyushu-u.ac.jp

Port: 993

Connection security: SSL/TLS

Authentication method: Normal password

Username: [redacted].kyushu-|

OUTGOING SERVER

Hostname: hosting6.cc.kyushu-u.ac.jp

Port: 587

Connection security: STARTTLS

Authentication method: Normal password

Username: [redacted].kyushu-|

[Advanced config](#)

Re-test Cancel **Done**

This completes the setting.