



## Thunderbird setting method (when using POP)

(1) Start Thunderbird and click [Tools] ⇒ [Account Settings].

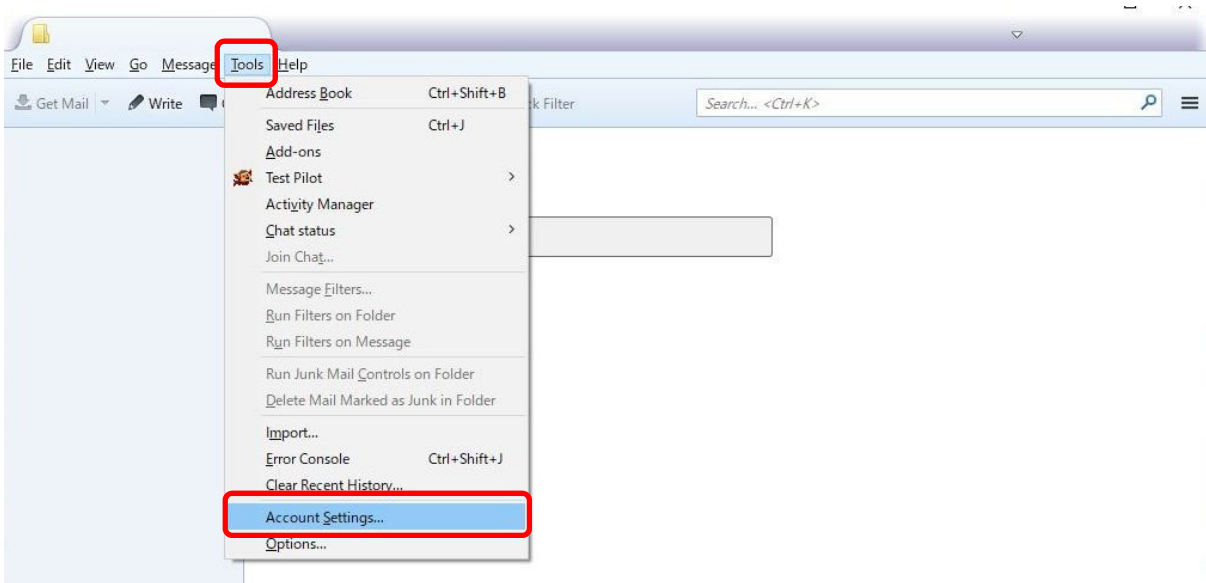

(2) Click [Account Actions] ⇒ [Add Mail Account].

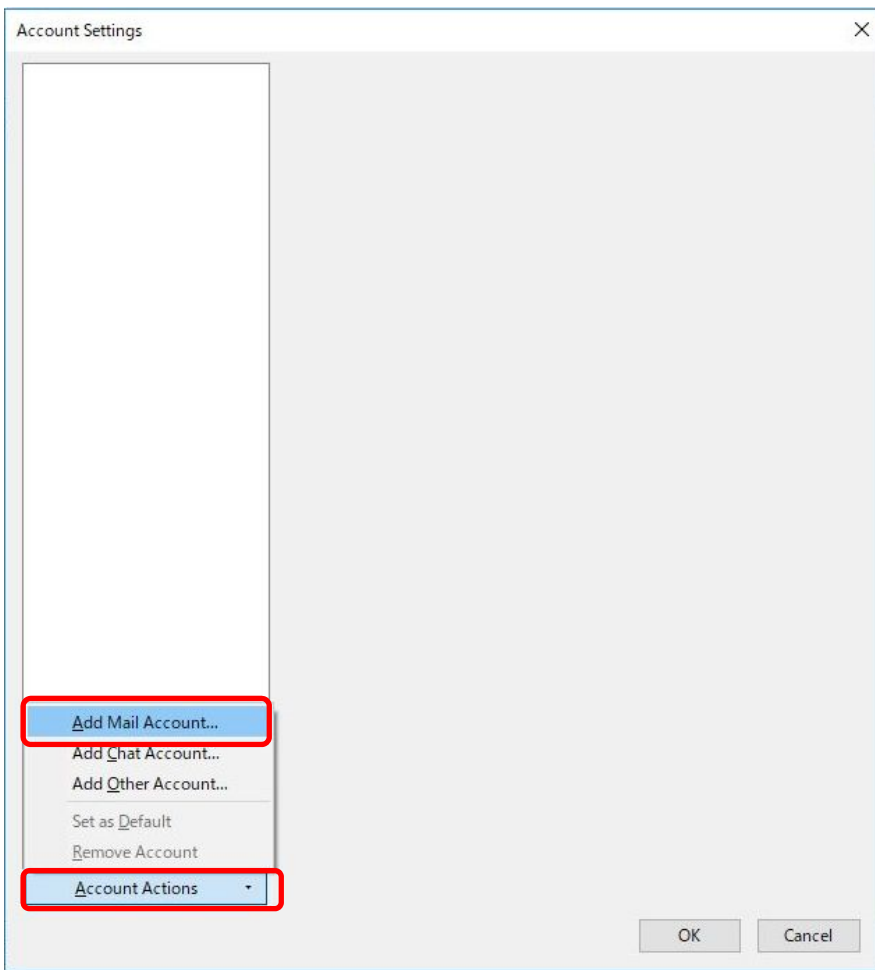

(3) Enter each item and click [Configure manually].

(4) Server search will start, but click [Manual config] and set as follows.

**【Receiving server】**

<b>Protocol</b>	POP3
<b>Host name of the server</b>	hosting6.cc.kyushu-u.ac.jp
<b>Number of Port</b>	995
<b>SSL</b>	SSL/TLS
<b>Authentication method</b>	Normal password
<b>Username</b>	E-mail address used for hosting

**【Sending server】**

<b>Protocol</b>	SMTP
<b>Host name of the server</b>	hosting6.cc.kyushu-u.ac.jp
<b>Port number</b>	587
<b>SSL</b>	STARTTLS
<b>Authentication method</b>	Normal password
<b>Username</b>	E-mail address used for hosting

(5) When setting is completed, click [Done].

**Manual configuration**

**INCOMING SERVER**

Protocol: POP3

Hostname: hosting6.cc.kyushu-u.ac.jp

Port: 995

Connection security: SSL/TLS

Authentication method: Normal password

Username: [redacted].kyushu-i

**OUTGOING SERVER**

Hostname: hosting6.cc.kyushu-u.ac.jp

Port: 587

Connection security: STARTTLS

Authentication method: Normal password

Username: [redacted].kyushu-i

[Advanced config](#)

Re-test Cancel **Done**

This completes the setting.